



## FaceKiosk-H13C

Advanced Biometric Kiosk

Android Based for an interactive touch screen kiosk efficiency

### Overview

When looking for flexibility combined with elegance, our **FaceKiosk-H13C** has you covered. This biometric kiosk is incorporating ZKTeco's latest Facial Recognition Algorithm Visible Light with anti-spoofing function, as well as ZKTeco's Z-ID fingerprint scanner delivering the most secure, accurate and fastest verification that combines with ease of use. Integrated with ZKBiosecurity and BioTime 8.0 for perfect access control and time management functionality.

This Android based kiosk is specially designed for integrators and developers thus can be used in a wide range of applications: from event Check-In, time recording, financial services like loyalty programs and payment and transactions, to ticketing and vending or information point, the self-service kiosk flexibility makes it a natural fit for many industries.

The sleek and modern look with an ergonomic build, easy to operate, user friendly interface, is completed with standard thermal receipt printer, mifare reader, barcode reader and top-mounted camera.


### Features

- Biometric Kiosk with simple, modern and functional design for indoor use.
- Ideal size and freestanding mode to adapt to any market environment.
- One face template per user.
- Anti-spoofing function.
- QR and Barcode & Ticket printing for queue management services.
- Powerful CPU.
- Capacitive Screen and speakers for interactive and friendly use.
- Support TCP/IP and WiFi.

# Specifications

<b>Attendance Record Capacity</b>	100,000	<b>Ticket Printer</b>	Line Thermal Printer Printing speed: 100mm/s (Max), Paper width: 58±0.5mm
<b>Facial Templates Capacity</b>	10,000	<b>RAM</b>	2GB DDR3
<b>User Capacity</b>	10,000	<b>ROM</b>	16GB
<b>Communication</b>	TCP/IP, Wiegand	<b>GHz</b>	1.8GHz
<b>Screen Dimensions</b>	13.3-inch capacitive touch screen	<b>CPU</b>	Quad-core A17 1.8GHz (ZKTeCo boosted)
<b>Resolution</b>	1920*1080	<b>Power Supply</b>	12V-3A
<b>Communication Port</b>	1*RJ45, TF card slot, 1*HDMI, RS232/485	<b>Operation Environment</b>	Operating Temperature: 0~+50 °C Operating Humidity: < 90% Storage Temperature: -40~+60 °C Storage Humidity: 20%~90%
<b>Camera Pixel</b>	2 million	<b>Operating System</b>	Android 5.1.1
<b>QR Code Module</b>	Barcode, QR Code	<b>Dimensions</b>	354*50*1420mm (L*W*H)

# Configuration

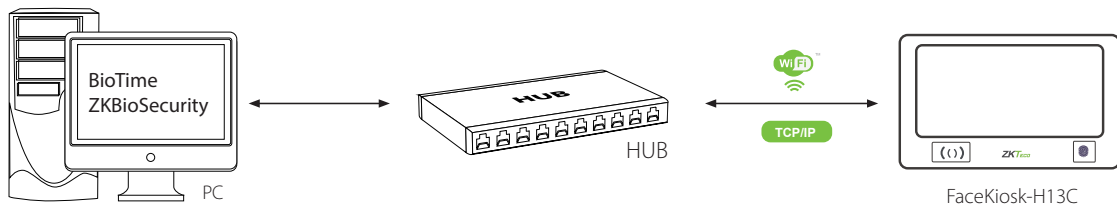

# Dimensions

