


Architecture and Engineering Specifications

OmniAC30
Contactless Biometric Standalone Terminal

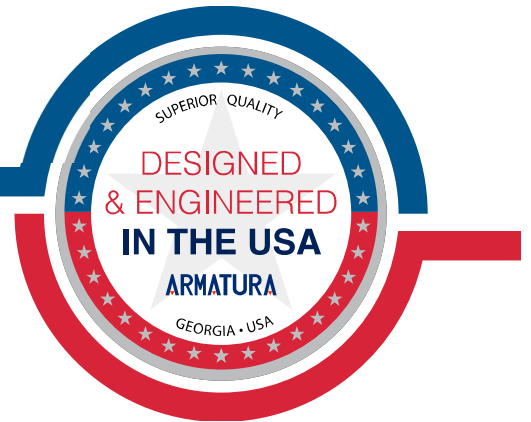

All trademarks, logos and brand names are the property of their respective owners.

Table of Contents

SECTION 1	3
1. PURPOSE	3
2. GOALS AND OBJECTIVES	3
3. KEY FEATURES AND REQUIREMENTS.....	4
4. DESIGN AND IMPLEMENTATION CONSTRAINTS	5
5. EXISTING STANDARDS AND REGULATIONS	5
6. SUBMITTALS.....	5
7. QUALIFICATIONS	5
8. WARRANTY.....	6
SECTION 2	7
KEY FEATURES AND REQUIREMENTS	7
TECHNICAL SPECIFICATIONS	10
MAINTENANCE AND SUPPORT.....	14
DOCUMENTATION.....	14
WARRANTY AND SUPPORT	14
TRAINING AND DOCUMENTATION.....	15

Section 1

1. Purpose

The purpose of this architecture and engineering specifications (A&E) document is to provide guidance for the design, implementation, and installation of the OmniAC Series, OmniAC30, an all-weather outdoor multi-tech smart standalone terminal for access control applications and security management.

2. Goals and Objectives

The OmniAC30 an all-weather outdoor multi-tech smart standalone terminal A&E document aims to achieve the following goals and objectives:

- Provide a highly secure and reliable multi-tech smart standalone terminal with multi-biometric technology combining palm and facial recognition.
- Ensure scalability and flexibility to accommodate varying user and system requirements.
- Meet or exceed relevant industry standards and regulations.
- Provide a clear and detailed specification for the design, supply, installation, and commissioning of the terminal.

3. Key Features and Requirements

The OmniAC30 an all-weather outdoor multi-tech smart standalone terminal shall have the following key features and requirements:

- A modern aesthetic design with a high-quality metal enclosure and a tempered glass panel.
- Offers a 5" high-resolution (1280*720) touchscreen and intuitive UI design with advanced algorithms and supporting palm recognition at distance ranging from 7" to 15.7", (18 to 40 cm) posture angle tolerance includes: pitch +/- 35° , yaw +/- 60° , roll +/- 35° and blend +/- 30° . While the facial recognition at distances ranging from 15.7" to 55.1" (40 to 120 cm) for dual camera liveness detection. The facial recognition at distances ranging from 15.7" to 78.7" (40 to 200 cm) for single camera liveness detection.
- Unrivalled palm and facial recognition with unique deep learning algorithm. A combination of visible light and NIR infrared recognition technology offers exceptional authentication accuracy.
- Palm, face, and RFID card recognition supports contactless authentication which suits the new standards of the post-pandemic world.
- Supports palm and face tracking for more intelligent capture the users' biometrics and avoid the users' biometrics from continuing to be compared after verifying.
- Supports 125 kHz and 13.56 MHz frequency credentials. Supports various card types including EM, IC Card, HID Prox, HID iCLASS, DESFire and FeliCa.
- Compatible with variable input voltage, from 9V to 24V.
- PoE option allows for minimal use of cabling and lowers the cost of installation. Also, it supports multiple mounting types including Asian, European and single-gang box. Mounting accessories for speed gates are available.
- Attain IP66 protection rating, providing waterproof and dustproof, fully operate in extreme weather conditions, including cold winters, heavy rains and dry/hot summers.
- Operating and storage temperature ranges from -20°C to 60°C/ -4°F - 140°F and operating humidity at 10% to 90% RH (non-condensing).

4. Design And Implementation Constraints

- The design and implementation of the EP30CF multi-tech fingerprint reader shall adhere to the following constraints:
- The design shall be scalable and flexible to accommodate varying user and system requirements.
- The implementation shall be done by trained installers who have been certified by the manufacturer.
- The implementation shall comply with relevant standards and regulations.
- The implementation shall ensure high-level cybersecurity to protect against unauthorized access or data breaches.

5. Existing Standards and Regulations

The OmniAC30 all-weather outdoor multi-tech smart standalone terminal shall comply with the following standards and regulations:

- FCC Standards
- CE Standards
- RoHS Standards

6. Submittals

The following submittals shall be provided by the manufacturer.

- Product data sheets
- Installation and operation manuals
- Technical support contact information
- Warranty information

7. Qualifications

The manufacturer shall have the following qualifications:

- ISO 9001 certification, ISO27701, ISO27001, ISO9001, ISO14001.
- Minimum of 5 years' experience in producing access control equipment.

8. Warranty

The manufacturer shall provide a limited 36-month warranty for the OmniAC30, an all-weather outdoor multi-tech smart standalone terminal to be free of defects in material and workmanship.

Section 2

Key Features and Requirements

Key Features

1. Support Multi-Factor Authentication Capability
 - Provides users with multiple ways to access it, such as palm and facial recognition, cards, QR codes, and PIN codes. It supports various types of IC cards and offers advanced biometric recognition methods like palm and facial recognition. Additionally, visitors and employees can use QR code scanning to access the system.
 - User capacity supports 50,000; Face capacity supports 10,000 (1:N) or 50,000 (1:1). Palm capacity supports 5,000 (1:N) or 20,000 (1:1).
 - Facial Recognition distance include dual camera liveness detection on 15.7" - 55.1" (40cm - 140cm). Single camera liveness detection on 15.7" - 78.7" (40cm - 200cm).
 - Palm recognition distance and angle tolerance is about 7" - 15.7" (18cm - 40cm) / Pitch +/- 35° , Yaw +/- 60° , Roll +/-35° , Blend +/-30° .
 - Facial recognition speed is 100ms (field test result).Palm recognition speed is 140ms (field test result).
 - Supports anti-spoofing live face detection.
 - Transaction buffer supports 1,000,000 records.
2. Support Multi-card Types
 - Supports 125kHz and 13.56 MHz frequency credentials. Supports various card types including EM, IC Card, HID Prox, HID iCLASS, DESFire and FeliCa.
 - User capacity: 50,000. RFID capacity supports 50,000 (1:N) or 50,000 (1:1). Palm capacity: 5,000 (1:N)/ 20,000 (1:1).
 - RFID reading distance (13.56MHz & 125kHz): up to 1.96"/ 50 mm (depending on environment and transponder).
 - Maximum RFID card number length is Wiegand In & Out (up to 64 bits).

3. Multi-Biometric technology offers an efficient authentication experience by combining palm and facial recognition with a deep learning algorithm. The technology utilizes a combination of visible light and NIR infrared recognition technology, providing exceptional authentication accuracy and industry-leading anti-spoofing protection.
4. Features the remote user enrollment, palm and mask detection, and facial recognition for users with or without masks. The device's Palm/Face/Card/QR code recognition technology supports contactless authentication.
5. Offers an improved user experience with its high-resolution 5" touchscreen with 1280*720 resolution, TFT touch screen. Its advanced algorithms ensure the best verification experience for users.
6. Equipped with 1.2GHz Quad Core ARM Processor.
7. High performance: 2.4 TOPS NPU.
8. Offers a storage capacity of 8GB for flash memory and 1GB of RAM.
9. Primary host communication with Ethernet: 10/100Mbps, auto MDI/MDIX. Complies with TLS1.2 for end-to-end secure communications channels.
10. Ethernet network connection with Port 1:10/ 100Mbps and auto MDI/MDIX.
11. Number of Ports: 1 TCP/IP; 1 RS-485; Input:4ch TTL inputs; Output: 1ch TTL output and 2 relays.
12. Inputs include Wiegand in, Button, Sensor in and Aux Input.
13. Outputs include 3 relays with dry contacts, Wiegand Output, lock, alarm and bell.
14. Normally open contact rating is 5A@30Vdc resistive.
15. Normally closed contact rating is 5A@30Vdc resistive.
16. Offers a magnetic tamper detection system through the tamper switch.

17. Provides 99 access group.
18. On-Board access-point control is 1 access point on board.
19. On-Board Reader Support is 1 (OSDP over RS-485) or 1 (Wiegand Input).
20. Compatible with variable input voltage, from 12 VDC to 24 VDC.
21. POE supported
22. Internal speaker with adjustable intensity (configurable on UI) with audio indicator.
23. Support microphone and video phone.
24. Attain IP66 protection rating, providing waterproof and dustproof, fully operate in extreme weather conditions, including cold winters, heavy rains and dry/hot summers.
25. Operating and storage temperature ranges from -20°C to 60°C/ -4°F - 140°F and operating humidity is 10% to 90%RH (non-condensing).

Technical Specifications

General Information	
Primary Power	12 to 24 VDC (3A min @ 12V)
POE	Supported
RS-485 connection	Port 1: RS-485 standard/ OSDP V2.1.7
CPU	1.2GHZ Quad Core ARM Processor
NPU	2.4TOPS NPU
Memory	8 GB Flash + 1 GB RAM
Camera	Face Automatic Exposure Palm Automatic Exposure Face tracking Palm tracking WDR HDR 50Hz to 60Hz Automatic Adaption Dual Camera CMOS 2MP (Output image 720P*1280P)
Primary Host Communication	Ethernet: 10/ 100 Mbps, auto MDI/ MDIX Complies with TLS 1.2 for end-to-end secure communication channel
Ethernet network connection	Port 1:10/ 100 Mbps, auto MDI/ MDIX
Data Protection	Complies with TLS 1.2 for end-to-end secure communication channel (Secured Communication between Standalone Terminal & Server) AES128 (Secured Communication between the Standalone Terminal & OSDP Readers & Access Control Panels)
Number of Ports	1*TCP/ IP 1*RS-485 Input: 4ch TTL Inputs Output: 1ch TTL Output 2 relays
Inputs	Wiegand in, Button, Sensor in, Aux Input
Outputs	2 relays with dry contacts, Wiegand Output, Lock, Alarm

Normally Open Contact Rating	5A @30Vdc resistive
Normally Closed Contact Rating	5A @30Vdc resistive
Tamper Switch	Magnetic tamper detection system
On-Board Monitor	Size: 5", Resolution: 1280*720, Touch Screen, TFT
Audio Indicator	Internal speaker with adjustable intensity (Configurable on UI)
MIC	Supported
Video Phone	Supported
User Capacity	50,000
RFID Card Capacity	50,000 (1:N) / 50,000 (1:1)
Maximum RFID Card Number Length	Wiegand In & Out (up to 64 bits)
Face Capacity	10,000 (1:N)/ 50,000 (1:1)
Palm Capacity	5,000 (1:N)/ 20,000 (1:1)
RFID Reading Distance	13.56MHz & 125kHz: Up to 1.96"/ 50 mm (depending on environment and transponder)
Face Recognition Distance	Dual Camera Liveness Detection On: 15.7" - 55.1" (40cm - 140cm) Single Camera Liveness Detection On: 15.7" - 78.7" (40cm - 200cm)
Palm Recognition Distance and Angle Tolerance	7" - 15.7" (18cm - 40cm) / Pitch +/-35, Yaw +/- 60, Roll +/-35, Blend +/-30
Face Recognition Speed	100ms (Field Test Result)
Live Face Detection (Anti-Spoofing)	Support
Recommend Installation Height:	Recommend Installation Height: 55" (140cm) (Using the plate with tilt angle) 59" (150cm) (Plate with horizontal angle)
Palm Recognition Speed	140ms (Field Test Result)
Transaction Buffer	Records: 1,000,000
Access group	99
On-Board Access Point Control	1 access point on board
On-Board Reader Support	1(OSDP over RS-485) or 1 (Wiegand Input)
Protection / Resistance	Weather & Dust Proof Protection Rating compliant with IP66

RFID / Biometrics Reader Interface	
Input Voltage	12 to 24 VDC (3A min @12V) (Equal to primary power input)
Maximum Input Current	12 to 24 VDC (3A min @12V) (Equal to primary power input)
RS-485 Protocol	OSDP 2.1.7 Secure Channel, AES-128
OSDP Mode	9600-115200 bps, OSDP V2.1.7, asynchronous, half-duplex, 1 start bit, 8 data bits, and 1 stop bit.
Wiegand	Wiegand In & Out (Up to 64 bits)
Data Inputs	TCP/IP, RS-485, OSDP and Wiegand standards supported. Maximum RS-485/ OSDP cable length: 500ft (152m) Maximum Wiegand cable length: 328ft (100m)

Cable Requirement	
Power & Relays	One twisted pair, 18 to 16 AWG
Ethernet	CAT-5, minimum 330 ft. (100m)
RS-485 Reader Port	9600-115200 bps, asynchronous, half-duplex, 1 start bit, 8 data bits, and 1 stop bit. One twisted pair with drain wire and shield, 120 ohm resistance, 22-18 AWG, Maximum cable length: 3937ft (1200m)
Wiegand Port	20 AWG shielded, 328ft. (100m)

Mechanical	
Dimensions	3.82" W x 1.112" D x 8.23" H (97 x 28.5 x 209mm)
Weight	835g
Mounting	Suited for mullion-mount door installations or any flat surface mounting Supports mounting plate installation (Single gang/ European/ Asian box) Supports rots-02 bracket
Housing Material	Aluminum alloy + Tempered glass

Environmental	
Operating & Storage Temperature	-4°F ~ 140°F (-20°C ~ 60°C)
Operating Humidity	10 - 90%RH (Non-condensing)
Certification(s)	CE, FCC, RoHS, UL (coming soon)

Software Interface	
TCP/IP Mode	Ethernet: 10 - 100Base-TX
TCP/IP Protocol	VLAN, SSH, HTTP, IPv4, DNS
TCP/IP Encryption	Complied up to TLS1.2 end to end secure communication channel
TCP/IP Communication	Push Protocol over HTTP, HTTPS and Spada Protocol over WebSocket
Supported Software	Armatura One Security System, Cielo365

Maintenance and Support

The OmniAC30 an all-weather outdoor multi-tech smart standalone terminal shall be supported by a comprehensive support program, which shall include the following:

- Regular software updates and security patches.
- Technical support via phone and email.
- Onsite repair services as needed.
- Spare parts availability.
- Training for system administrators and end-users.

Documentation

The supplier shall provide the following documentation for the OmniAC30 an all-weather outdoor multi-tech smart standalone terminal:

- User manual
- Installation guide
- Technical specifications
- Software release notes
- Warranty terms and conditions

Warranty and Support

The OmniAC30 an all-weather outdoor multi-tech smart standalone terminal shall be covered by a minimum of 36 month manufacturer's warranty that covers defects in materials and workmanship. The manufacturer shall provide remote technical support and assistance to the installer and end-user during the installation and operation of the controller.

Training and Documentation

The manufacturer shall provide the following training and documentation for the OmniAC30 an all-weather outdoor multi-tech smart standalone terminal:

- User manuals and technical documentation for installation, configuration, and operation of the controller.
- Online training courses and videos for system administrators and operators.
- On-site or remote training sessions for system integrators and installers.
- Technical support and assistance for system integrators, installers, and end-users.

*Note Certifications may vary by region and country. Please consult the manufacturer for specific certifications applicable to your location.