


RS485 Reader Series



KR100M-RS



KR502E/M-RS



KR503E/M-RS

Specifications

Read Range

KRxxx-E: Up to 10CM

KRxxx-M: Up to 5CM

Reading Time

≤200ms

Input Port

External LED Control

External Buzzer Control

Operating Temperature

-20°C to 65°C(-10° to +70°C)

Supported Panel

C3-200, C3-400, InBio160,

InBio460

Power/Current

DC 6-14V / Max.70mA

Operating Humidity

10% to 90% relative humidity

non-condensing

Material

ABS+PC with texture

Beeper

Yes

LED

Red and Green LEDs

Index of Protection

KR100M-RS:IP65

KR502E/M-RS:IP64


KR503E/M-RS:IP65

Output Format

RS485

Dimensions

	KR100M-RS	KR502E/M-RS	KR503E/M-RS
Height	11.6cm	8.6cm	11.6cm
Depth	1.7cm	2.6cm	1.6cm
Width	7.5cm	4.4cm	7.5cm
Weight	120g	150g	120g

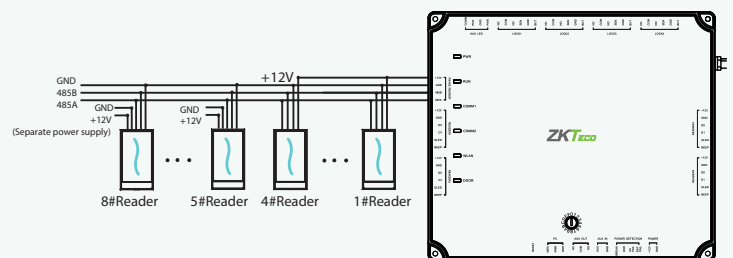

ZKTECO CO.,LTD.
E-mail: sales@zkteco.com
www.zkteco.com

© Copyright 2017. ZKTECO CO.,LTD. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

