

FR1500-WP

Flush-Mounted RS-485 Fingerprint Slave Reader



Features

- Single gang Standard junction box installation.
- Flush-Mounted Design for neat installation.
- RS-485 Communication Interface.
- SilkID Fingerprint Sensor.
- Stainless Steel Front casing.
- Fingerprint Protective Cover.
- Waterproof

Specifications

Additional Info

Working Temperature: -10 °C ~ 45 °C
 Working Humidity: 20 ~ 95%
 Dimensions(LxWxH): 121.3 × 77.3 × 38 mm
 Algorithm: ZKFinger v10.0

Power Supply

Operating Voltage 12V DC
 Stand-by Mode Power Consumption:12V*60mA=0.72W
 Peak Current of Fingerprint scanning:140mA

Hardware

1.0 GHz CPU
 ZKSilkID Sensor
 Buzzer Prompt
 Three-color Indicator Light

Optional Features

125KHz RFID Card
 125KHz HID Prox Card
 13.56MHz MifareCard(S50 / S70)
 13.56MHz HID Iclass Card



Compatibility

inBio/inBioPro Controllers
 Standalone Fingerprint Devices


Communication

RS485

Configuration

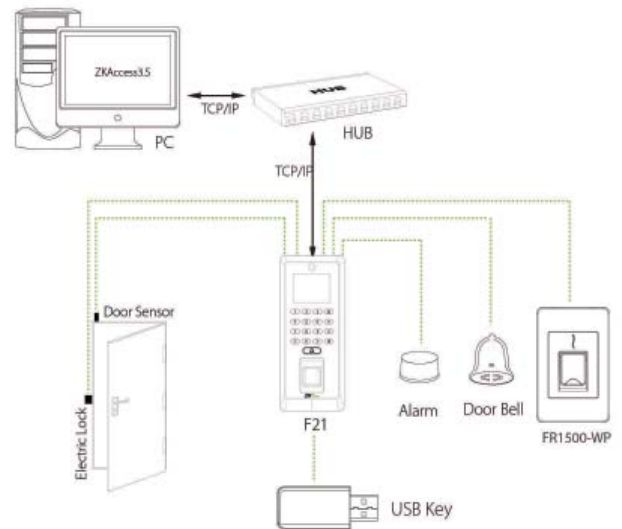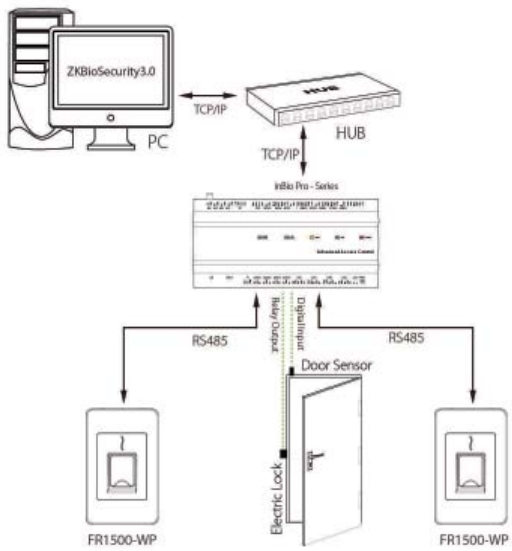

Dimensions (mm)

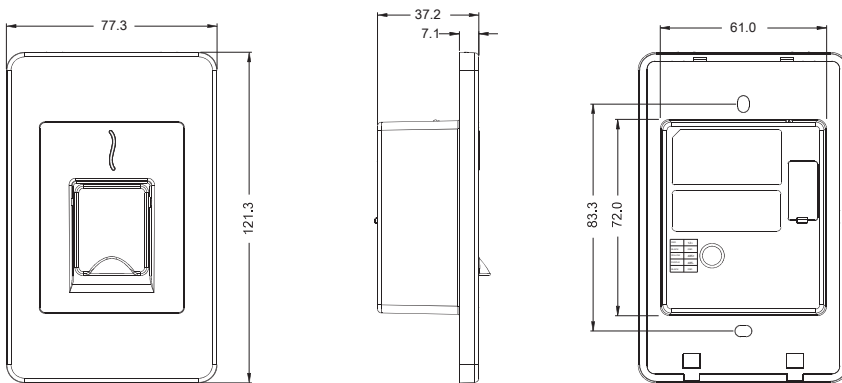

ZKTeco Europe.

Av. Camino de lo Cortao, 10. Nave 1.
 28703 San Sebastián de los Reyes. Madrid. SPAIN
 Tel: +34 916 532 891 E-mail: sales@zkteco.eu
 www.zkteco.eu

© Copyright 2016. ZKTeco Inc. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

